

Haier Biomedical Blood Banking Centrifuge



LX-75L2400R



Qingdao Haier Biomedical Co., Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266111, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Mar, 2026



Haier Biomedical



Haier Biomedical
International



Haier Biomedical
International



Haier Biomedical
International



Haier Biomedical
International

Advanced Centrifugation Solutions for Modern Blood Banking

Step into a realm of unmatched convenience with the Haier Biomedical LX-75L2400R Blood Banking Centrifuge, tailored to exceed the demanding needs of blood bank centrifugation. Redefine efficiency as the LX-75L2400R effortlessly accommodates up to 16 x 500 ml blood bags or 6 x 2400 ml centrifuge bottles, delivering optimal sedimentation results with each run.

Elevate your laboratory's capabilities with the LX-75L2400R's extensive rotor options, its formidable motor, and user-friendly control panel, all complemented by a robust refrigeration system and an array of versatile accessories.

Crafted for excellence, the LX-75L2400R is the centrifuge of choice for blood banks and transfusion centers. Its superior design also finds extensive application in the forefront of biopharmaceuticals, cell therapy, biological culture, vaccine production, and academic research, making it a pivotal tool in diverse scientific fields.

Excellent Performance

Unlock the full potential of your blood processing center with the LX-75L2400R's expansive capacity and cutting-edge selection of rotors, carriers, and adapters, masterfully designed to handle a diverse array of high-capacity applications. This powerhouse is the epitome of versatility, perfect for sophisticated bioprocessing, clinical diagnostics, and comprehensive blood sample preparation. It also serves as IVD laboratory equipment when used with IVD tubes and diagnostic analysis systems, separating human blood for hematological, immunological, and cardiovascular diagnostic tests.

Quiet yet powerful, the LX-75L2400R redefines operational convenience, setting a new standard in the industry. At its heart lies a microprocessor-controlled frequency motor, delivering robust torque and rapid acceleration, all while ensuring an extended motor lifespan. Achieve peak performance with speeds soaring up to 7,500 rpm and forces reaching 13,376 x g, propelling your research to new heights with unmatched precision and reliability



Expansive Memory

Maximize efficiency with over 1000 program memories, ready to streamline your workflow.



Precise Control

Tailor your operations with 15 acceleration and 16 deceleration stages for unparalleled precision.



Rapid Cooling

Achieve 4°C in just 15 minutes from room temperature, speeding up your readiness.



Maintenance-Free Motor

Enjoy seamless operation with our brushless induction motor that requires no maintenance and ensures a clean lab environment.



Quiet Operation

Work in peace with a sound design that keeps noise levels below 60 dB, even at maximum speed.



Stability

Trust in the stability of our low-center-of-gravity design for consistent performance and optimal centrifugal results.

Ergonomic Design 



One-Touch Automation

Experience unparalleled convenience with our one-button automatic door mechanism that seamlessly opens and closes from front to back, ensuring quick and easy access while maintaining sterility standards.



Automated Rotor Lid Management

With our centrifuge, the rotor lid opens and closes automatically, complete with lid storage, reducing manual effort and enhancing workflow efficiency.



Intuitive 10-Inch Touch Screen

The expansive 10-inch touch screen interface provides operators with user-friendly navigation through settings and features, making operation straightforward and minimizing training time.



Electric Push Rod

Engineered for safety, the electric push rod offer smooth and controlled opening and closing of the centrifuge chamber, providing an extra layer of protection to users.



316 Stainless Steel Chamber

The premium 316 stainless steel construction of the centrifuge chamber ensures a rust-free and contaminant-resistant environment that is exceptionally easy to clean and maintain.



Versatile Rotor Capacity

Our centrifuge accommodates a variety of research needs with three rotors designed for 250ml, 500ml, 1000ml, 2000ml, and 2400ml centrifuge bottles, as well as 500ml blood bags, maximizing your laboratory's throughput capabilities.



Emergency Lid Release

The lid can be opened by utilizing the reset hole on the side plate. Rotate a 5mm hex key clockwise several times to open the lid.

Interactive 10-inch LCD Touchscreen



Glove-Friendly and Ergonomic

The 45° angled, glove-friendly touchscreen offers a wide viewing angle, making it comfortable and practical for users of all heights.



Enhanced Access Controls

Equipped with user login and password protection, ensuring individualized program data management for each user.



Visibility and Monitoring

Enlarged track bar display of set and actual run conditions during centrifugation, ensuring clear visibility from a distance.




Program Recall and Efficiency

Quick recall feature for over 1000+ programs with alpha-numeric naming, minimizing time between runs and facilitating quick starts for routine users.




Adjustable On-the-Fly

Users can alter speed, centrifugal force, time, and temperature during the centrifugation process for precise control.

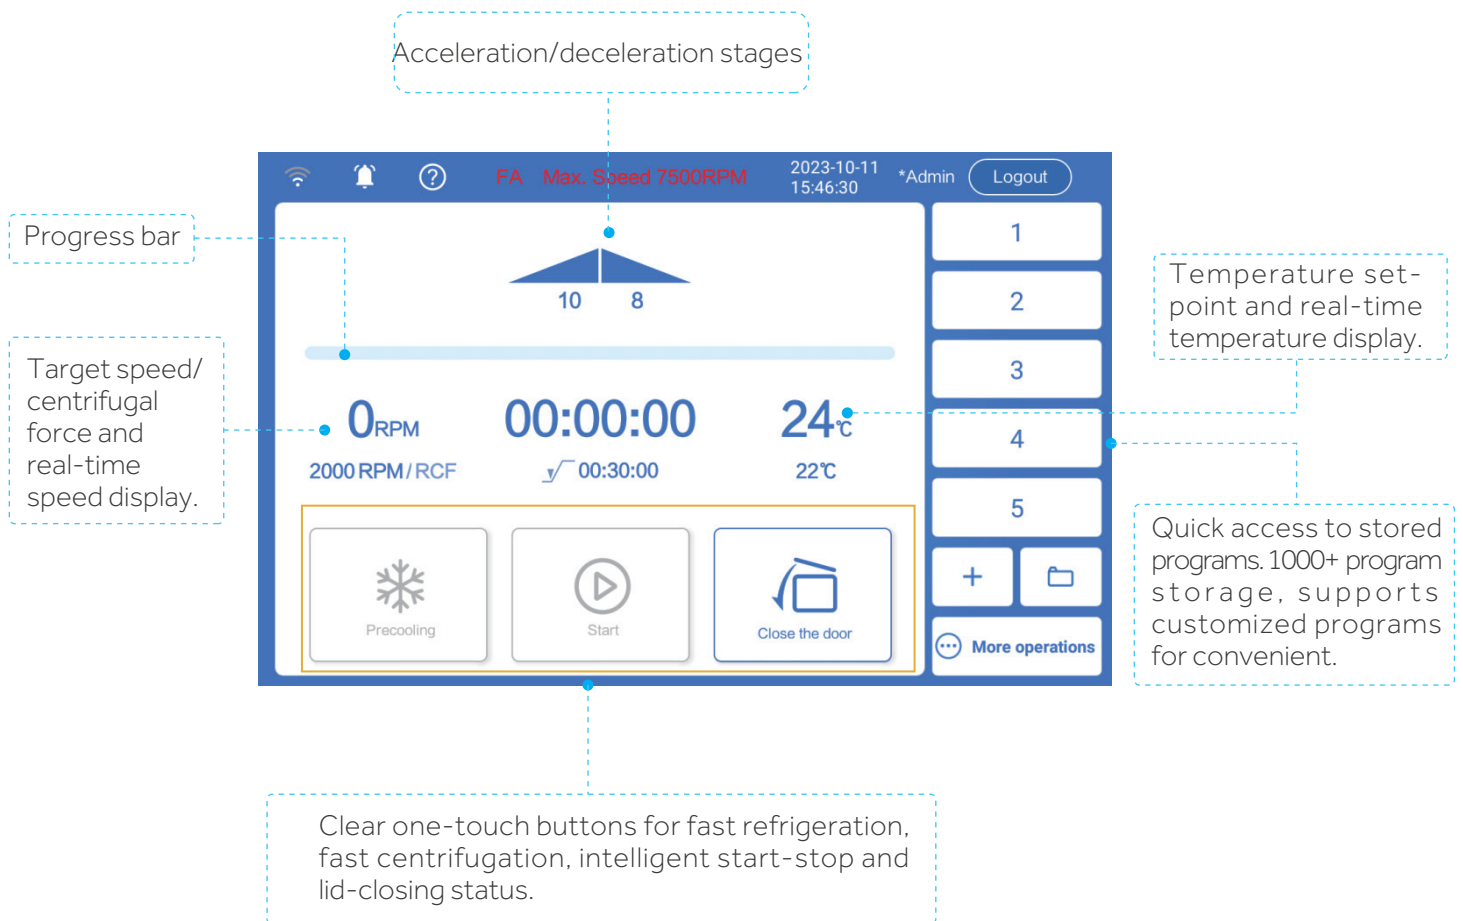


Multiple operation setting modes, including unique blood bank mode function, convenient for blood bank users to use.

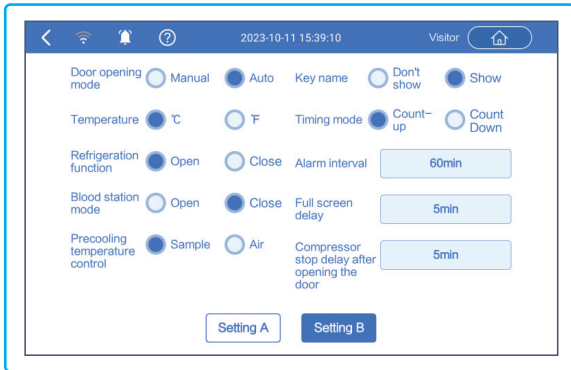


Multi-echelon program running mode, achieving continuous operation of multiple speed steps for special users



Electronic level assists in installation and leveling, making installation easier and simpler

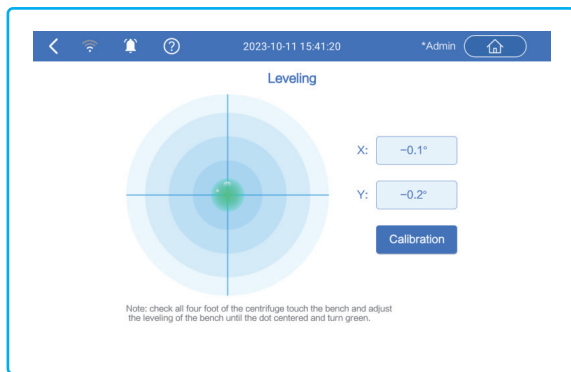

The operation record including speed, time and temperature, operation curve with alarm messages etc. can be tracked on the screen and exported by USB port

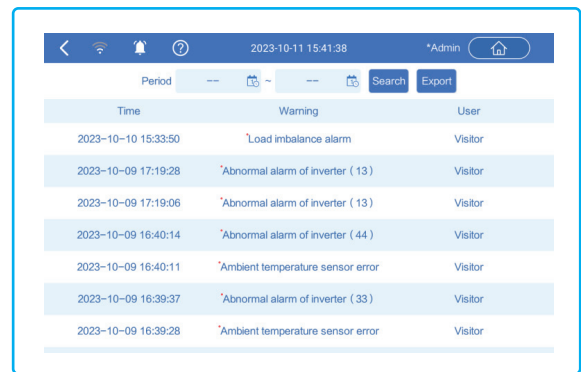

Enhanced Safety



Immediate Imbalance Detection & Shutdown
Offers real-time loading imbalance detection with instant shutdown to protect against imbalances.



Stable Installation
Φ 120mm adjustable feet ensure the centrifuge is securely and stably installed in any setting.



Comprehensive Alarm System
Features a multi-faceted alarm system for abnormal voltage, high temperature, overspeed, load imbalance, rotor absence, brake anomalies, and rotor life.



Anti-Vibration Lid Lock
Prevents accidental opening during operation, ensuring sample integrity and operator safety.



Robust Construction
Fully covered steel plate protective sleeve and a 12mm steel shell provide enhanced durability and user safety.



High-Quality Connectivity
Equipped with an imported 5-core aviation plug for easy, fast, and safe usage.

Real - World Efficacy 

Blood Station User: Blood centrifugal test



Haier Biomedical

VS




Other Brand

Precision Layering

Clear Separation with Distinct Leukocyte Layer, Eliminating the Need for Re-Separation

Scientific Research User: Seaweed centrifugal test



Haier Biomedical

VS




Other Brand

Optimal Centrifugation

Clear Layering, High Yield, and Zero Wall Adhesion

Technical Data

| Model | LX-75L2400R |
|---------------------------------|---|
| Maximum Capacity | 8*2000ml* or 16*500ml blood bags |
| Max Speed (rpm) | 7,500 |
| Max RCF(xg) | 13,376 |
| Speed Accuracy (rpm) | ±5 |
| Time Setting Range | 1min~99h59m59s (1-second increment) |
| Precooling Function | Yes |
| Temperature Setting Range | -20°C~40°C, adjustment increment: 1°C |
| Display | 10 inch touch screen |
| Noise (dB(A)) | ≤60 |
| Power Supply (V/Hz) | 3~400/50/60 |
| Power Plug | Aviation plug  |
| Power (W) | 6400 |
| Exterior Dimensions (W*D*H)(mm) | 900*1050*1020 |
| Lid Opening Height (mm) | 1780 |
| Net Weight (kg) | 620 |
| Packing Dimensions (W*D*H)(mm) | 1092*1279*1720 |
| Gross Weight (kg) | 750 |
| Other Functions | Rotation speed/RCF switchover, inching operation, running process indicator, sound alert, adjustable acceleration/deceleration, user logging, user lock-out, automatic door opening, on-screen display for imbalance, over temperature, stainless steel chamber |
| Certification | CE |

*Buckets for 2000ml centrifuge bottles can be customized depending on requirements.



| BE No. | BE12DC000 | BE12JP002 | BE12JQ002 | BE12K1000 |
|--------------------------|----------------------------|-----------------------------------|-----------------------------------|---|
| Type | Fixed-angle rotor (Sealed) | Adapter (Sets of 6) for BE12DC000 | Adapter (Sets of 6) for BE12DC000 | Centrifuge Bottle (Sets of 6) for BE12DC000 |
| Max Capacity | 6*1000ml | 500ml | 250ml | 1000ml |
| Max RCF (xg) | 13,376 | - | - | - |
| Max Speed (rpm) | 7,500 | - | - | - |
| Max Bottle Capacity (ml) | 1000 | 500 | 250 | - |
| Bottles Per Rotor | 6 | 6 | 6 | - |
| Bottle Type | Flat bottom | Flat bottom | Flat bottom | - |

Swing-Out Rotor 



Swing-Out Rotor
12 Blood Bags

Swing-Out
Rotor Block



| | |
|-------------------------|------------------|
| BE No. | BE12F5001 |
| Max. RCF (xg) | 5,331 |
| Max. speed (rpm) | 4,000 |



Bucket
(Sets of 6)



| | |
|---------------------|---------------------------------|
| BE No. | BE12H4000 |
| Max Capacity | 2*500ml blood bags or 2400ml |
| Bucket Type | Flat bottom |

Adapter/Bottle(Sets of 6) for BE12H4000



| BE No. | BE12JT001 | BE12K0000 |
|-------------------------------------|--------------------------|-------------------|
| Type | Double blood bag adapter | Centrifuge bottle |
| Max Capacity | 2*500ml blood bags | 2400ml |
| Blood bags/Bottles per rotor | 12 blood bags | 6 bottles |



Swing-Out Rotor
16 Blood Bags


Swing-Out
Rotor Block



| | |
|-------------------------|------------------|
| BE No. | BE12FP001 |
| Max. RCF (xg) | 5,706 |
| Max. speed (rpm) | 4,000 |



Double Blood Bag
Bucket (Sets of 8)



| | |
|---------------------|--------------------|
| BE No. | BE12H9000 |
| Max Capacity | 2*500ml blood bags |
| Bucket Type | Flat bottom |

Adapter(Sets of 8) for BE12H9000

| BE No. | BE12JF002 |
|-----------------------------|--------------------------|
| Type | Double blood bag adapter |
| Max Capacity | 2*500ml blood bags |
| Blood bags per rotor | 16 |

